



REVISION			
Rev.	Description	Date	Approval
-	-	-	-

OF N(gf) max	RF N(gf) min	PT (mm) max	MD (mm) max	OT (mm) min	OP (mm)
3.43 (350)	1.12 (114)	0.4	0.05	0.13	15.9±0.4

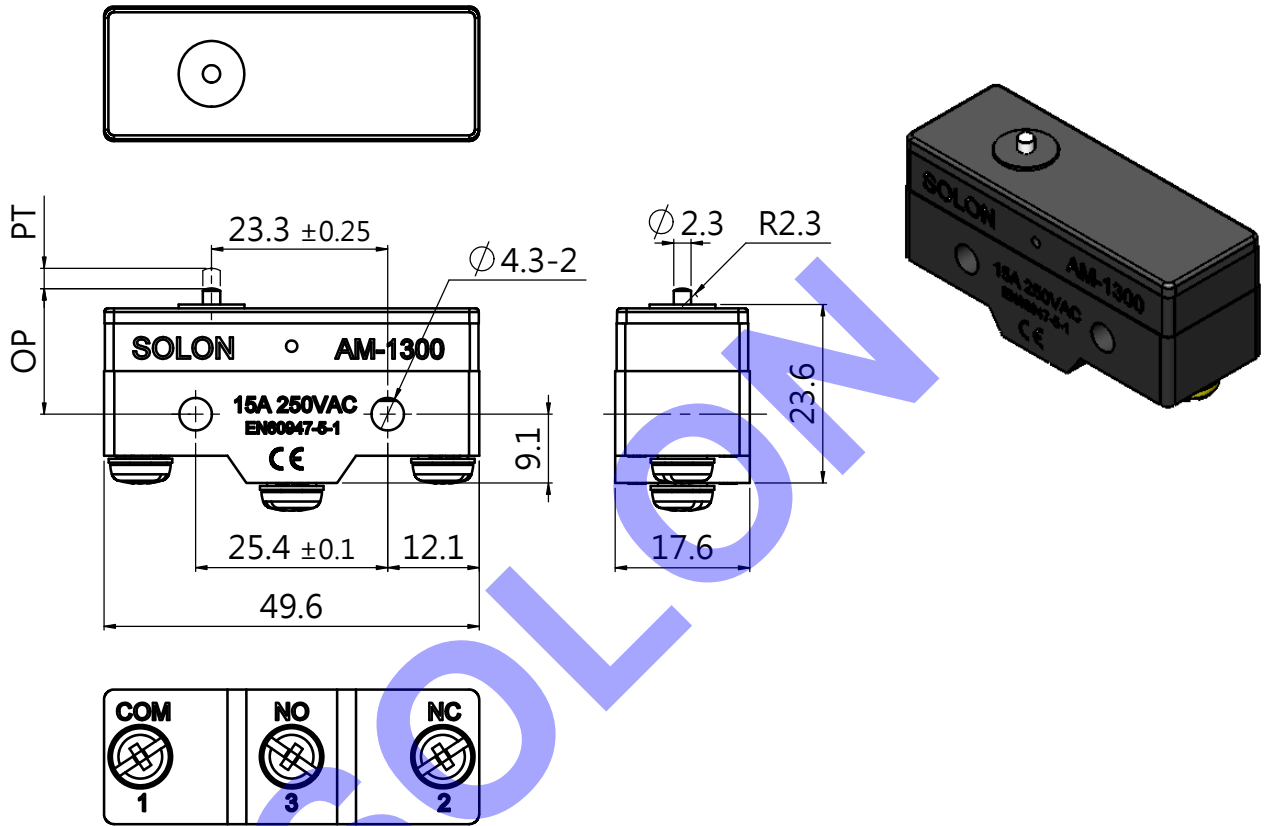

Notes:

- Contact type 接點型式: 1a1b (1C)
- Contact resistance 接觸電阻 (Initial 起始): 20mΩ max.
- Insulating resistance 絕緣電阻 (Initial 起始): 100MΩ @500VDC
- Dielectric strength 耐電壓:
Between non-continuous terminals 非連續端子間: 1,500 VAC/1 minute, 50/60 Hz
Between current-carrying metal parts and ground, and between each terminals and non-current-carrying parts
電流載體對地及非電流載體對每端子: 2,000VAC/ 1 minute, 56/60Hz
- Vibration resistance 耐震動 (Malfunction失效): 55Hz max@1.5mm, double amplitude
- Shock resistance 耐衝擊 (Malfunction失效): 98m/s @10G max.
(Destruction損壞): 294m/s @30G max
- Ambient temperature 使用溫度: -20°C to +60°C @RH90% max.
- Life expectancy 壽命: Mechanical機械-10,000,000 operations min. (120 cpm)
Electrical電子- 200,000 operations min. (30 cpm)
- Operating frequency 操作頻度: 120 operations/ minute max.
- Operating rating 額定電流: 15A/250VAC



批准
2022.06.23
洋健企業

洋健企業
2022.06.23
工程部

		DIMENSIONS ARE IN MILLIMETER		NAME	DATE	Model NO.	
		TOLERANCES:		DRAWN	Neafa	2013/6/21	AM-1300
		FRACTIONAL ±		CHECKED			Card NO.
		ANGULAR: MACH ± BEND ±		ENG APPR.			AM-838
		TWO PLACE DECIMAL ±		MFG APPR.			PART NO.
		THREE PLACE DECIMAL ±		Q.A.			AA-1029-0
		MATERIAL		PART NAME			
		FINISH		Micro Switch			
NEXT ASSY	USED ON	APPLICATION		DO NOT SCALE DRAWING		SIZE	
				DWG. NO.		AA-1029-0	REV.
				SCALE:1:5		WEIGHT:	0
						SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLON ENTERPRISE CO., LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLON ENTERPRISE CO., LTD. IS PROHIBITED.

SOLON