

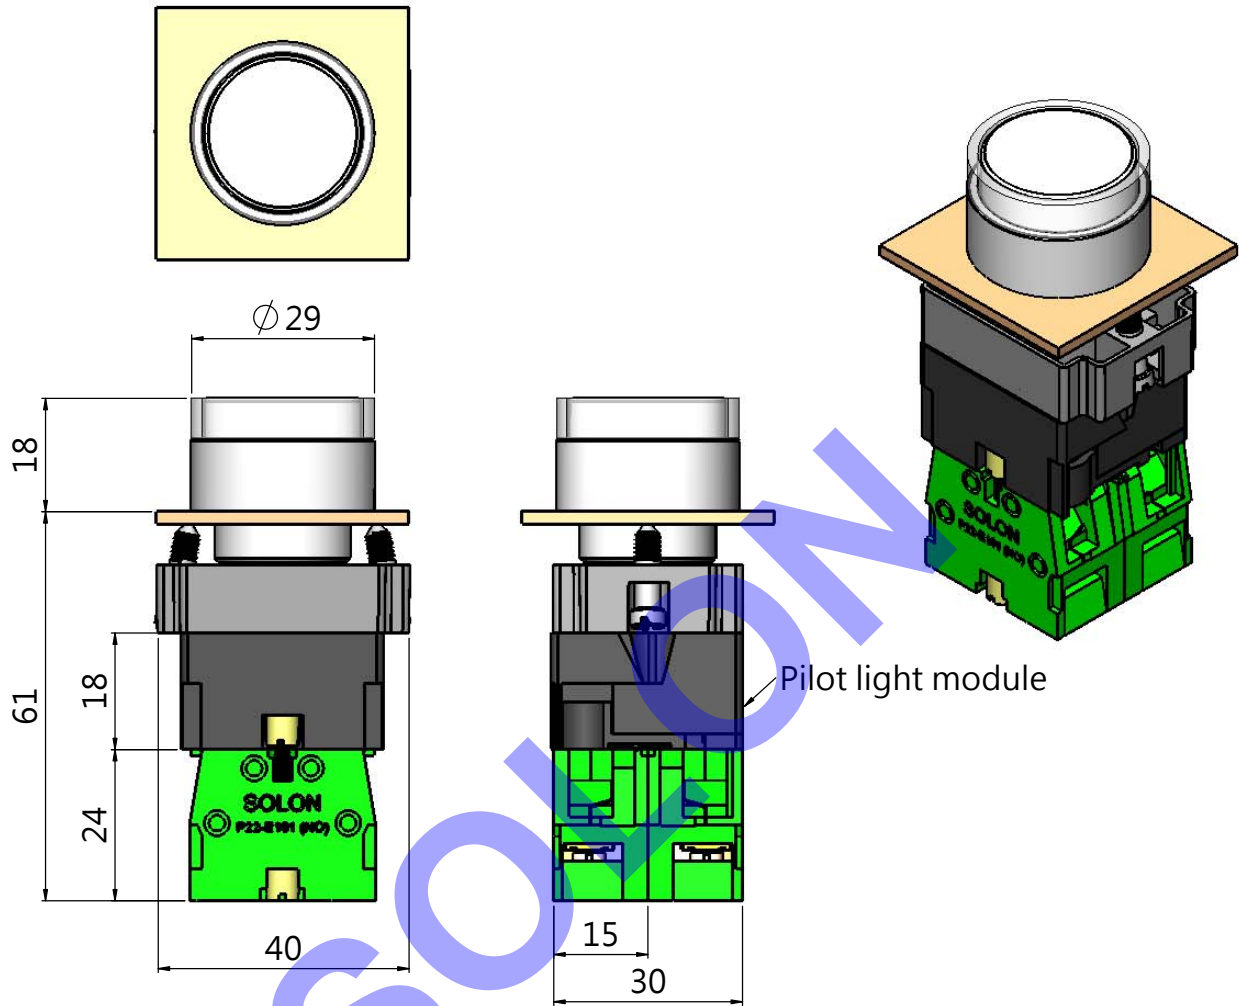


REVISION			
Rev.	Description	Date	Approval
-	-	-	-



Notes:  
 Installation diameter:  $\varnothing 22$   
 Rating: AC-15 : A600 (Ue = 240 V , Ie = 3 A)  
           DC-13: Q600 (Ue = 250 V , Ie = 0.27 A)  
 Nominal thermal current: 10 A (IEC 60947-5-1)  
 Rated current Ie : 3 A (AC-15)  
 Rated voltage Ui : 600 V ( IEC 60947-4-1 )  
 Withstand voltage Uimp: 6 KV ( IEC 60947-4-1 )  
 Contact type: Slow break  
 Terminal type: CENELEC EN 50013  
 Frequency : 60 operations/min.  
 Protection degree: IP-65  
 Operating temperature: - 25°C ~ +70°C  
 Storage temperature: - 40°C ~ +70°C  
 Mechanical life: 1,000,000 operations



洋健企業  
2022.03.01  
工程部

批准  
2022.03.01  
洋健企業

		DIMENSIONS ARE IN MILLIMETER		NAME	DATE	Model NO. <b>P22-BW3163</b>	
		TOLERANCES: FRACTIONAL $\pm$ ANGULAR: MACH $\pm$ BEND $\pm$ TWO PLACE DECIMAL $\pm$ THREE PLACE DECIMAL $\pm$		DRAWN	Neafa	2013/7/31	
		MATERIAL		CHECKED			Card NO. <b>P22-753</b>
		FINISH		ENG APPR.			PART NO. <b>AA-9053-0</b>
NEXT ASSY USED ON		DO NOT SCALE DRAWING		MFG APPR.			PART NAME
APPLICATION				Q.A.			<b>Flush Button with LED lamp Button Switch</b>
				<b>SOLOON</b>		SIZE <b>A</b> DWG. NO. <b>AA-9053-0</b>	
						SCALE:1:5	WEIGHT:
						SHEET 1 OF 1	

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLON ENTERPRISE CO., LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLON ENTERPRISE CO., LTD. IS PROHIBITED.