
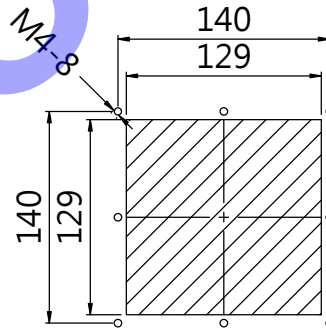
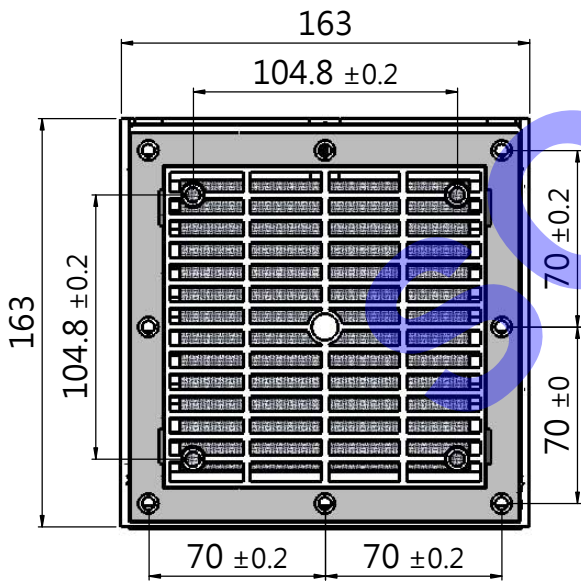
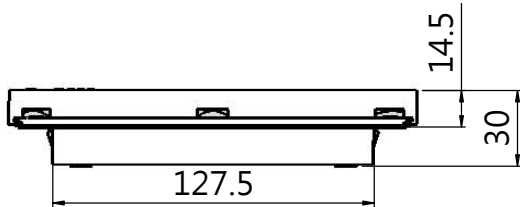
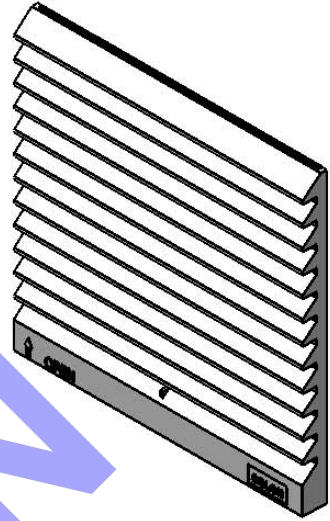
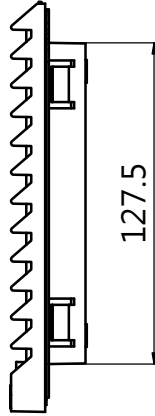


REVISION			
Rev.	Description	Date	Approval
-	-	-	-

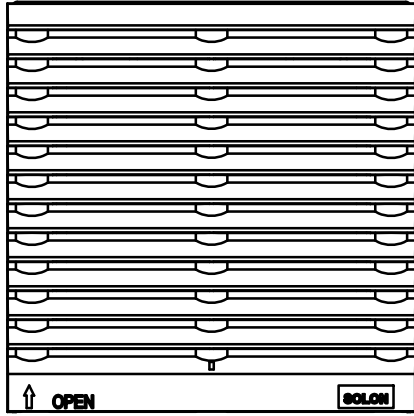

Panel cutout
開孔尺寸圖

Notes:

1. Installation 開孔尺寸(mm): 129x129 mm²
2. Effective wind rate 有效風量: 28 m³/min
3. Max. wind speed 最大風速: 2.0 m³/sec
4. Collection coefficient 集塵效率: 85% max.
5. Temperature range 使用溫度: -10 °C ~ +80 °C
6. Materials 材質: ABS resin, UL94-HB
7. Protection degree: IP-54防護等級
8. Apply to fan size 適用風扇尺寸: 120x120 mm²
9. Inner filter: Non-woven fabric 不織布

洋健企業
2022.03.03
工程部

批准
2022.03.03
洋健企業

		DIMENSIONS ARE IN MILLIMETER		NAME	DATE	Model NO.	
		TOLERANCES:		DRAWN	Neafa	2013/6/21	MU-04
		FRACTIONAL ±		CHECKED			Card NO.
		ANGULAR: MACH ± BEND ±		ENG APPR.			HC-809
		TWO PLACE DECIMAL ±		MFG APPR.			PART NO.
		THREE PLACE DECIMAL ±		Q.A.			AB-6009-0
		MATERIAL		PART NAME			
		FINISH		Louvered Filter			
NEXT ASSY	USED ON	APPLICATION		SOLON		SIZE	DWG. NO.
		DO NOT SCALE DRAWING				A	AB-6009-0
						SCALE:1:5	WEIGHT:
						SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLON ENTERPRISE CO., LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLON ENTERPRISE CO., LTD. IS PROHIBITED.